



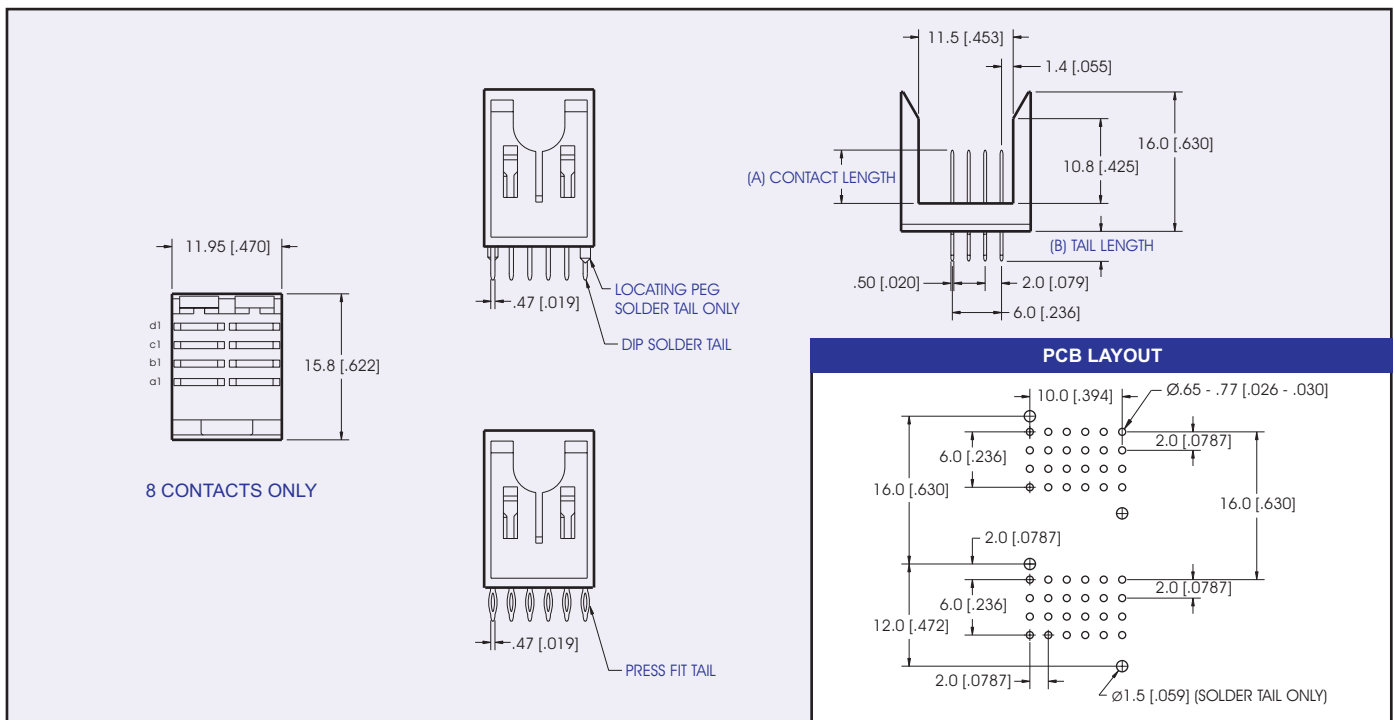

# 7400 Series Futurebus 4 Row Header Power


## Specifications

Insulator Material: Liquid Crystal Polymer (LCP)  
 94V-O, UL Recognized.  
 Contact Material: Copper Alloy  
 Contact Plating: Gold and/or Tin over .000050" Ni  
 (See contact plating options)  
 Insulation Resistance: 1000 M ohms min.  
 Contact Resistance: 30 m ohms max.  
 Dielectric Withstand Voltage: 1000 VAC  
 Current Rating: 3 AMP  
 UL File Numbers: E146967 & E176234



DIMENSIONS ARE IN MM & [INCHES]

## PART NUMBERING

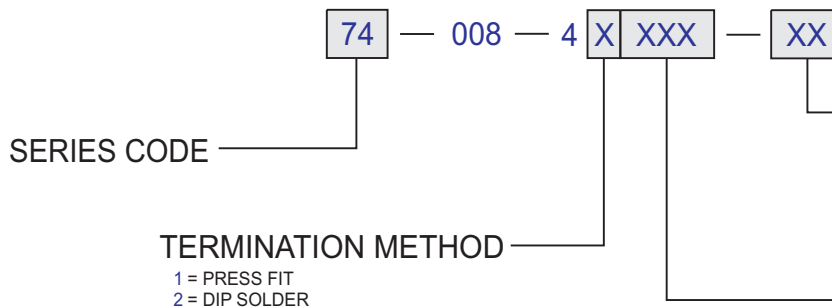

P/N CODE	001	002	003	101	102	103	201	202	203
TERMINATION*	PF/DS	PF	PF	PF/DS	PF	PF	PF/DS	PF	PF
(A) CONTACT	6.5mm	6.5mm	6.5mm	7.25mm	7.25mm	7.25mm	8.0mm	8.0mm	8.0mm
(B) TAIL LENGTH	4.3mm	13.6mm	17.0mm	4.3mm	13.6mm	17.0mm	4.3mm	13.6mm	17.0mm

\*PF = PRESS FIT  
DS = DIP SOLDER

FOR CUSTOM LOADED CONNECTORS PLEASE USE CUSTOMER REQUEST FORM ON PAGE D-47