

.079 [2.00] ELEVATED SOCKET



Specifications



Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40° ~± 105° C
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T
 Finish: See Contact Plating



Recognized under the recognized component Program of Underwriters Laboratories, Inc.

Products specifications are subject to be changed without notice.

For drawings, technical data or samples, contact E.C.S. at (714) 895-6351

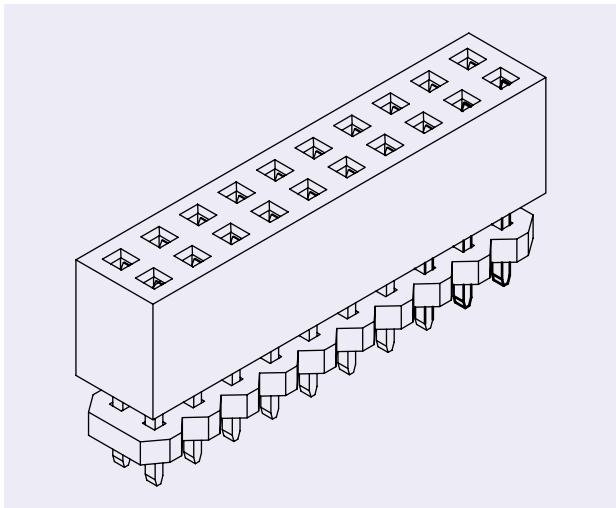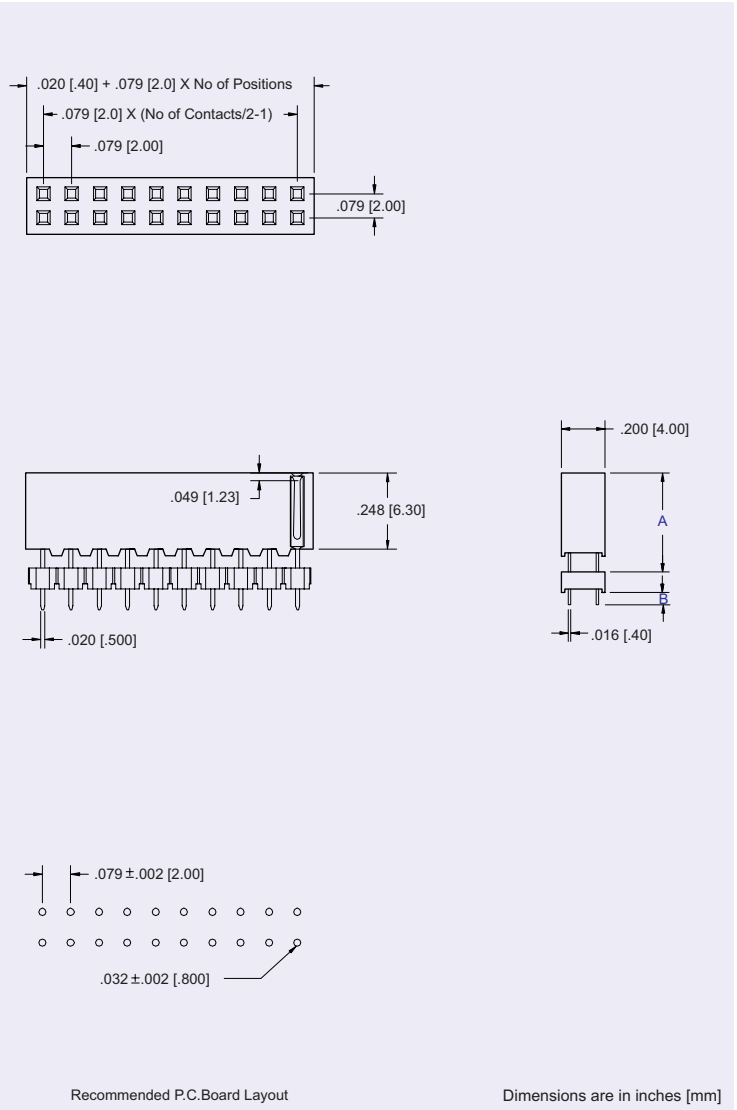

PART NUMBERING

SERIES CODE — **94 XX S** — **M XX** — **XX** — CONTACT PLATING

NO. OF CONTACTS

10 to 98
 A0 = 100 Contacts

PIN LENGTH		
	A	B
03	.370 [9.40]	.091 [2.30]
04	.339 [8.60]	.552 [13.0]

CONTACT PLATING

Lead Free & RoHS Compliant

.000050" Nickel underplate
CONTACT TAIL

03 = Gold Flash
 80 = 10µ" Gold
 85 = 15µ" Gold
 90 = 30µ" Gold
 70 = Tin Plated
 75 = Au Flash 100µ" Tin
 15 = 10µ" Au 100µ" Tin
 25 = 15µ" Au 100µ" Tin
 35 = 30µ" Au 100µ" Tin

CONSULT FACTORY FOR CONNECTORS BUILT TO YOUR DESIGN