





1900 Series PCI Card Edge Connector .050 [1.27] Contact Centers

Specifications


- Accommodates .062 ± .008 PC Board
- Ryton or Thermx insulator
- 1 amp current rating
- .150 grams normal force min.
- Insulation Resistance: 5000 M
- Dielectric Withstand Voltage: 250 V DC
- Voltage Drop: 30 m volt at rated current
- Contact Resistance: 30 m max. at rate current
- Board Insertion Force: 16 oz. max. per contact pair using .062 [1.58mm] thick steel test blade
- Board Withdrawal Force: 1 oz. min. per contact pair using .062 [1.58mm] thick steel test blade.
- Operating Temperature: -54° to 125° C

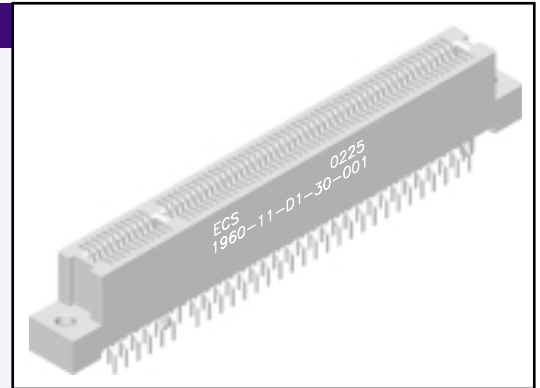


Recognized under the recognized component Program of Underwriters Laboratories, Inc.
File Numbers: E146967 and E176234

For drawings, technical data or samples, contact E.C.S. at (714) 895-6351


MOUNTING STYLE

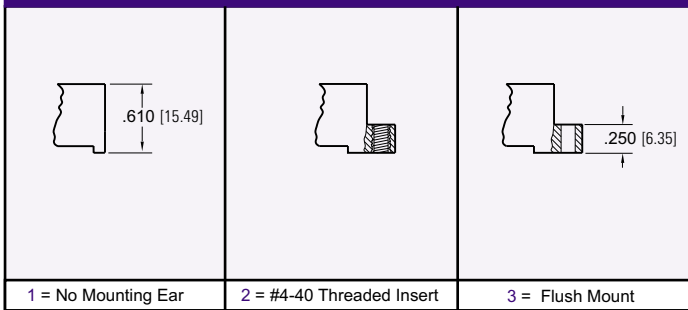


TERMINATION TYPE

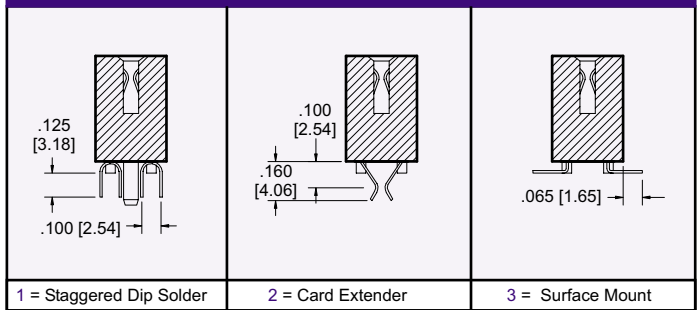


PART NUMBERING

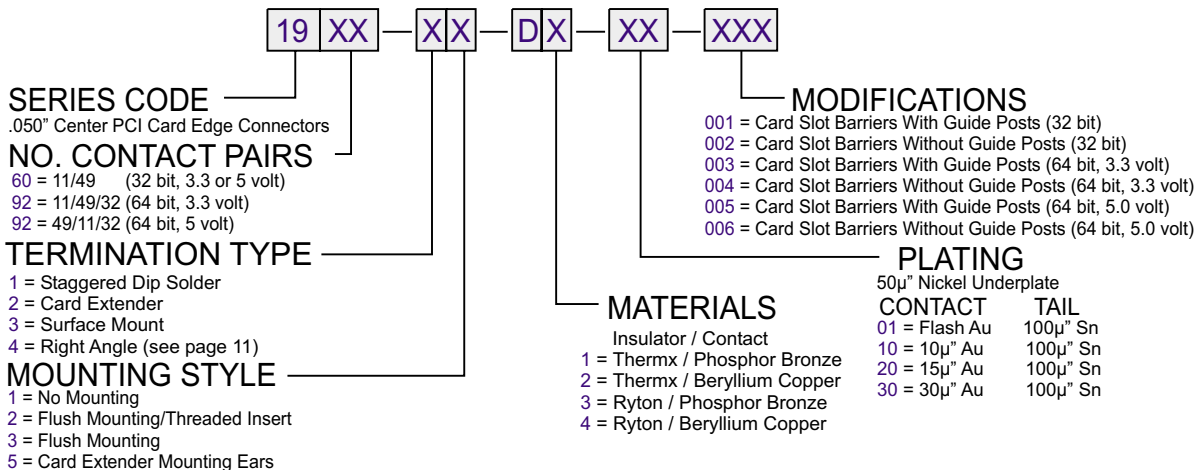

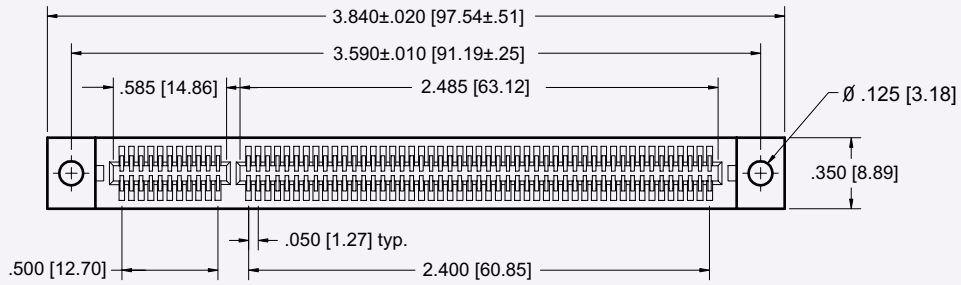


60 (11/49) Positions, 32 bit, 3.3 or 5 volt

Dimensions are in inch [mm]

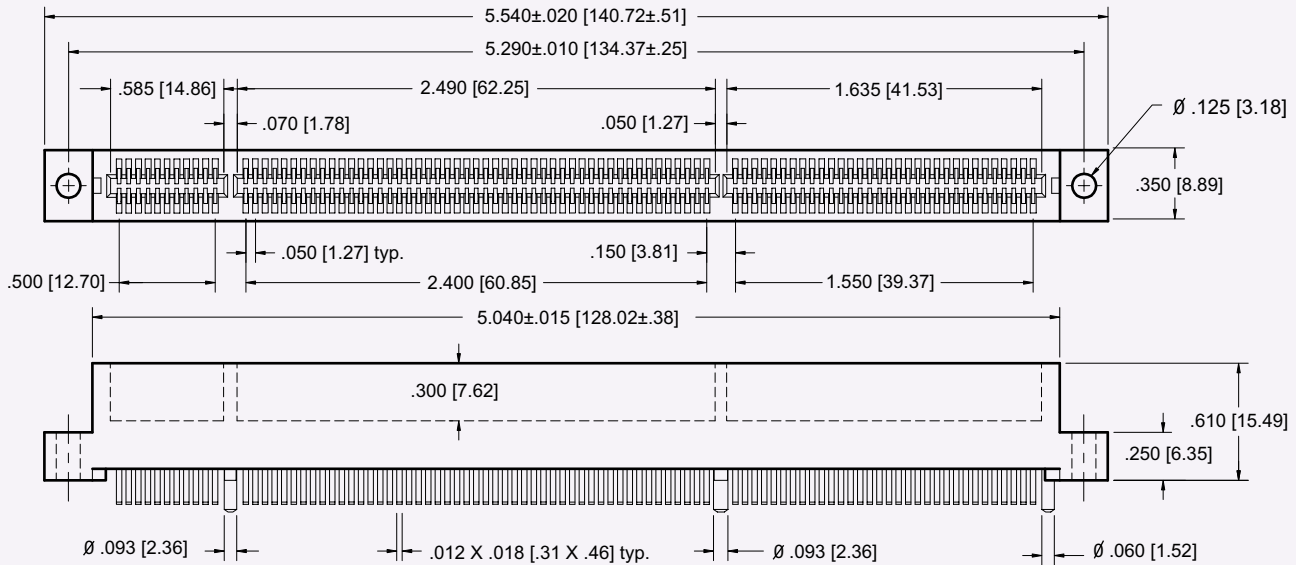

92 (11/49/32) Positions, 64 bit, 3.3 volt

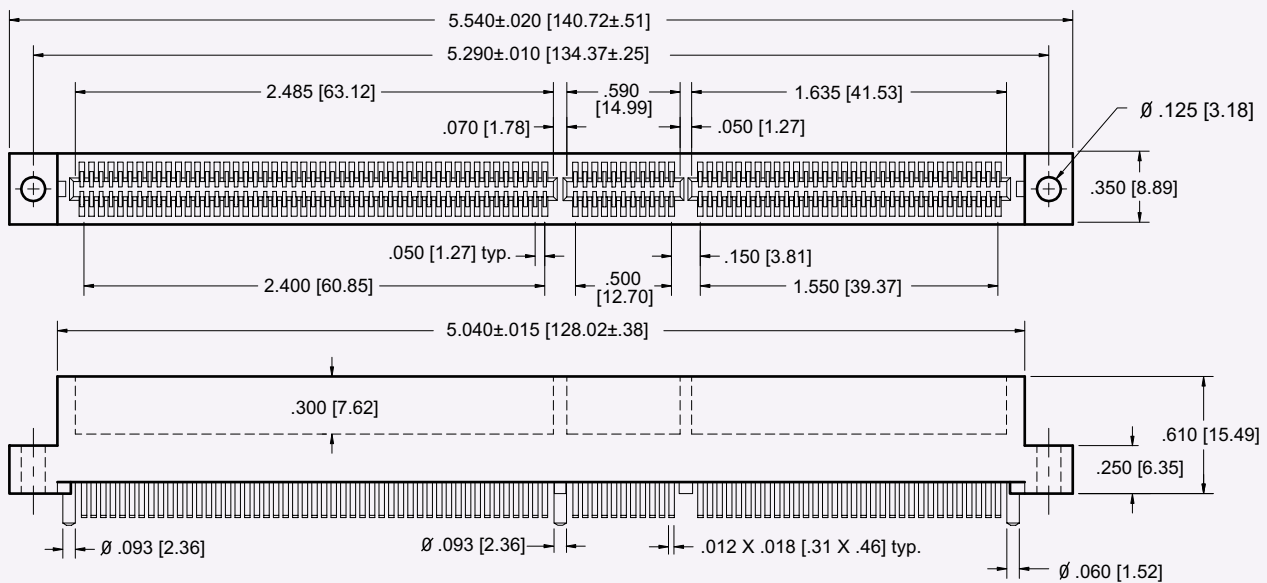

92 (49/11/32) Positions, 64 bit, 5 volt

CONSULT FACTORY FOR CONNECTORS BUILT TO YOUR SPECIFICATION