







# 8000 Series D-Subminiature .350 Right Angle High Density with EMI Filter



**PLUG**



**RECEPTACLE**

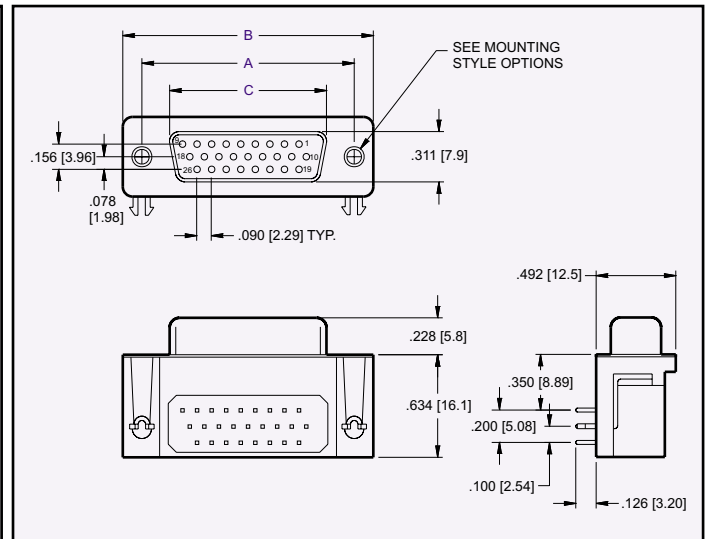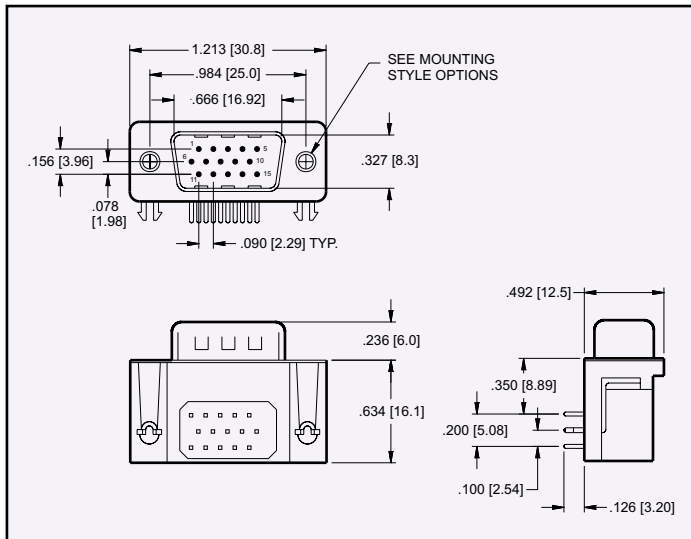


RECEPTACLE

CONTACTS	A	B	C
15	0.984 [25.00]	1.213 [30.80]	0.642 [16.30]
26	1.312 [33.32]	1.543 [39.20]	0.969 [24.60]

Dimensions are in inches [mm]

## PART NUMBERING



SERIES CODE

NO. OF CONTACTS

15 = Plug  
15, 26 = Receptacle

CONNECTOR TYPE

P = Plug  
S = Receptacle

MOUNTING STYLE OPTIONS

See Page E-05 For Options  
08 = Riveted Ground Hooks with #4-40 UNC Open  
Consult Factory for other Mounting Options

CONTACT PLATING

50µ" Nickel Underplate  
Mating Area Tail  
05 = Au Flash 100µ" Tin Lead  
20 = 15µ" Gold 100µ" Tin Lead  
30 = 30µ" Gold 100µ" Tin Lead

SHELL PLATING

50µ" Nickel Underplate  
1 = Tin Plating (standard)

INSULATOR COLOR

1 = Black