





2.0mm FutureBus 4 Row Back Mount Shroud



Contact	Dim A	Dim B
24	11.95	10.00
48	23.95	22.00
72	35.95	34.00
96	47.95	46.00
120	59.95	58.00
144	71.95	70.00
168	83.95	82.00
192	95.95	94.00

Specifications

1. Insulator Material: Liquid Crystal Polymer (LCP) 94V-O, UL Recognized.
2. Insulation Resistance: 1000 M ohms min.
3. Dielectric Withstand Voltage: 1000 VAC
4. Operating Temperature: -55°C To +125°C
5. UL File Numbers: E 176234, IEEE 896.10 FutureBus+

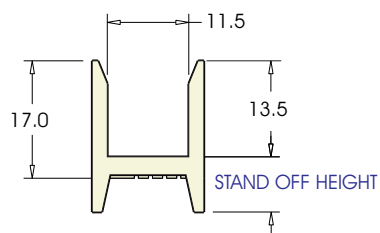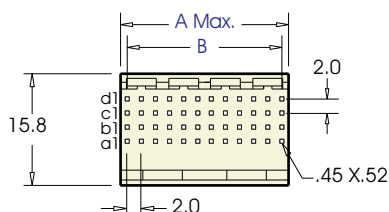

PART NUMBERING

74 — XXX — 4S XXX

SERIES CODE

NO. OF POSITIONS

SEE TABLE ABOVE

STAND OFF HEIGHT

240 = 2.40 [.095]
440 = 4.40 [.173]
690 = 6.90 [.272]