




PRESS FIT

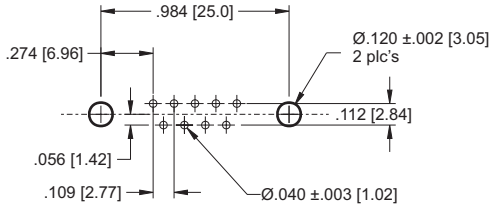


9 Positions

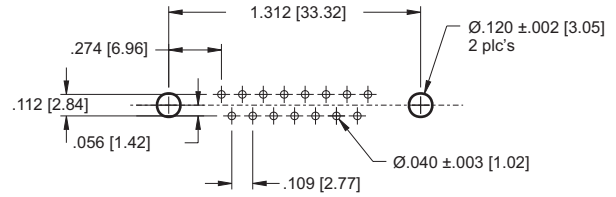

15 Positions

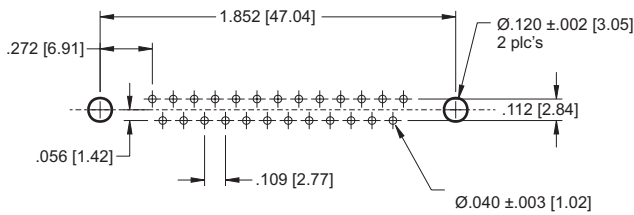

25 Positions

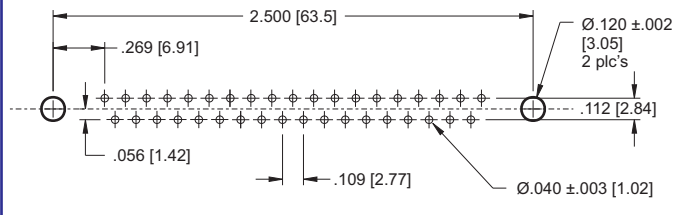

37 Positions


Hole Size Requirements:

Drilled Hole Diameter: $\text{Ø}.0453 \pm .003$ [1.15]
 Plating: .001 [.025] - .003 [.076] copper and
 .0003 [.008] Tin Lead.
 Finished Hole Diameter: $\text{Ø}.040 \pm .003$ [1.02]


Dimensions are in Inches [mm]

All Tolerances are $\pm .005$, Unless Otherwise Noted.


STRAIGHT PCB SOLDER

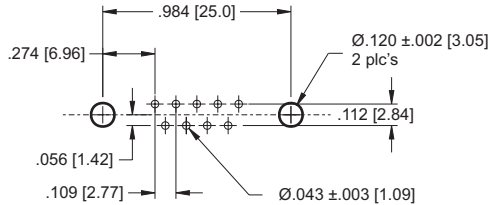


9 Positions

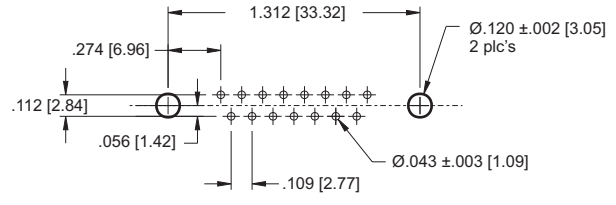


15 Positions

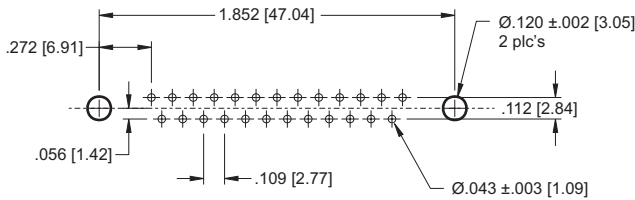

25 Positions

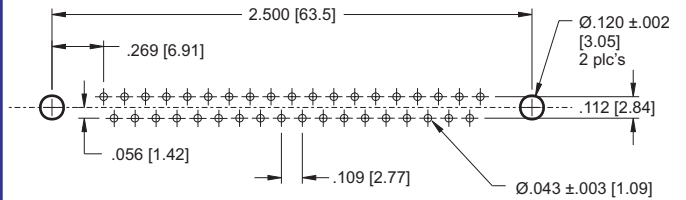

37 Positions

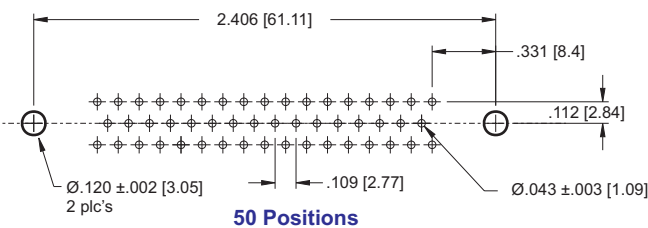

50 Positions

HIGH DENSITY STRAIGHT

	PLUG	RECEPTACLE
15 Positions		
26 Positions		
44 Positions		
62 Position		

Dimensions are in Inches [mm]

All Tolerances are ± 0.005 , Unless Otherwise Noted.

HIGH DENSITY RIGHT ANGLE

	PLUG	RECEPTACLE
15 Positions		
26 Positions		
44 Positions		
62 Position		