

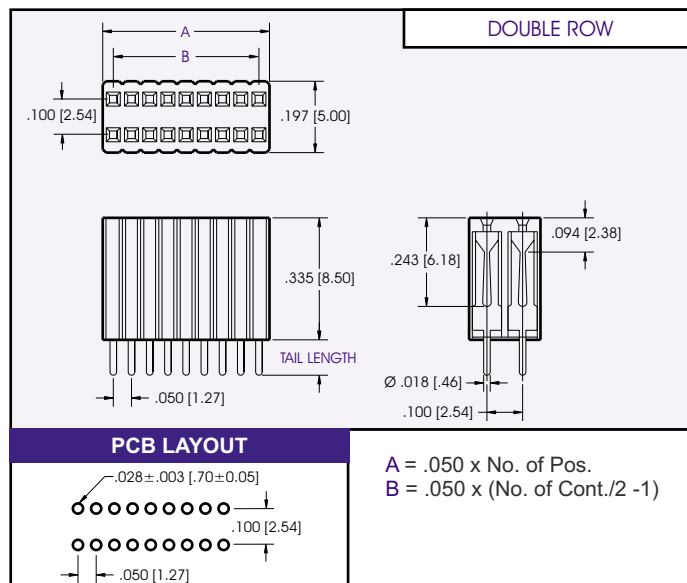


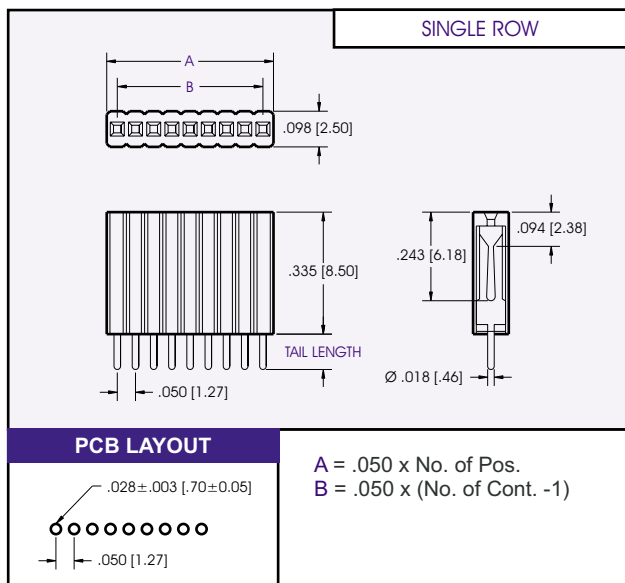

9600S Series Sockets .050 [1.27] High Profile Sockets


Specifications

Insulator Material: Glass filled polyester, Thermoplastic,
94V-O Nylon-6T, UL Recognized.
Contact Material: Phosphor Bronze
Contact Plating: Gold and/or Tin over .000050" Ni
(See contact plating options)
.Insulation Resistance: 5000 M ohms min.
Contact Resistance: 20 m ohms max.
Dielectric Withstand Voltage: 500 VAC
Current Rating: 1 AMP
Operating Temperature: -40°C To +105°C
Max. Processing Temp.: 230°C for 60 seconds
UL File Numbers: E146967 & E176234

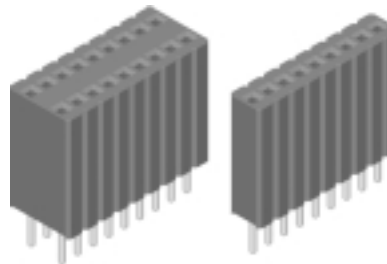

DIMENSIONS ARE IN INCHES [MM]

PART NUMBERING

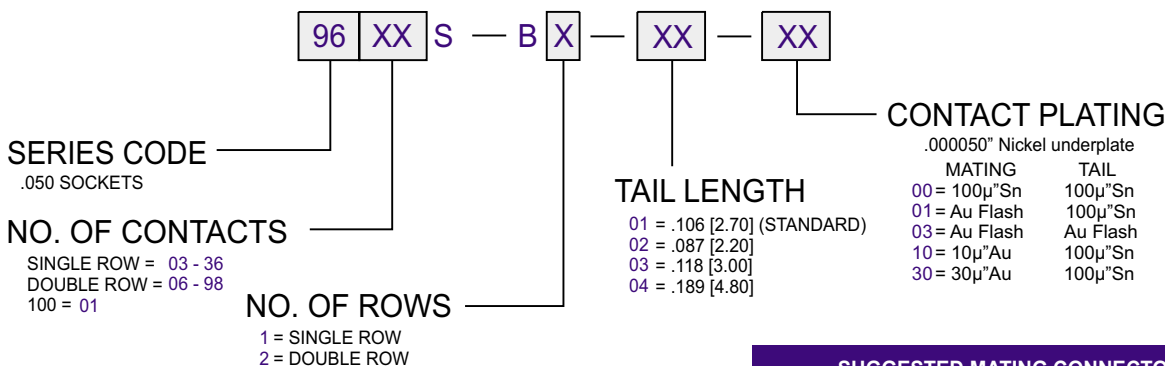

SUGGESTED MATING CONNECTORS

SINGLE ROW:	DOUBLE ROW:
96XX-AX-02-XX (F-05)	96XX-JX-X2-XX (F-14)
96XX-BX-02-XX (F-06)	96XX-K1-02-XX (F-15)
96XX-CX-02-XX-XXX (F-07)	96XX-C2-02-XX-XXX (F-07)

CONSULT FACTORY FOR CONNECTORS BUILT TO YOUR SPECIFICATION