





€-Z met™ 2mm HM Type AB-25 Header, Straight

Type AB, Vertical Male 125 Pin Connector


The €-Z met™ type AB vertical male connector provides 125 signal contacts and an optional 44 ground shield contacts in a 5+2, 25 position configuration. The Type AB connector does not have a multifunction block for coding, thus providing an extra 15 signal contacts. The type AB connector is designed to be used by itself or together with type B, C, L, M or N €-Z met™ connectors.

ECS offers 15 different standard tail lengths to choose from to provide various premate and midplane configurations. Contacts can be selectively loaded to accommodate customer specific applications. Custom tail lengths and mold configurations are also available. For non standard loading, or custom applications please refer to the fax request form on page D-35.

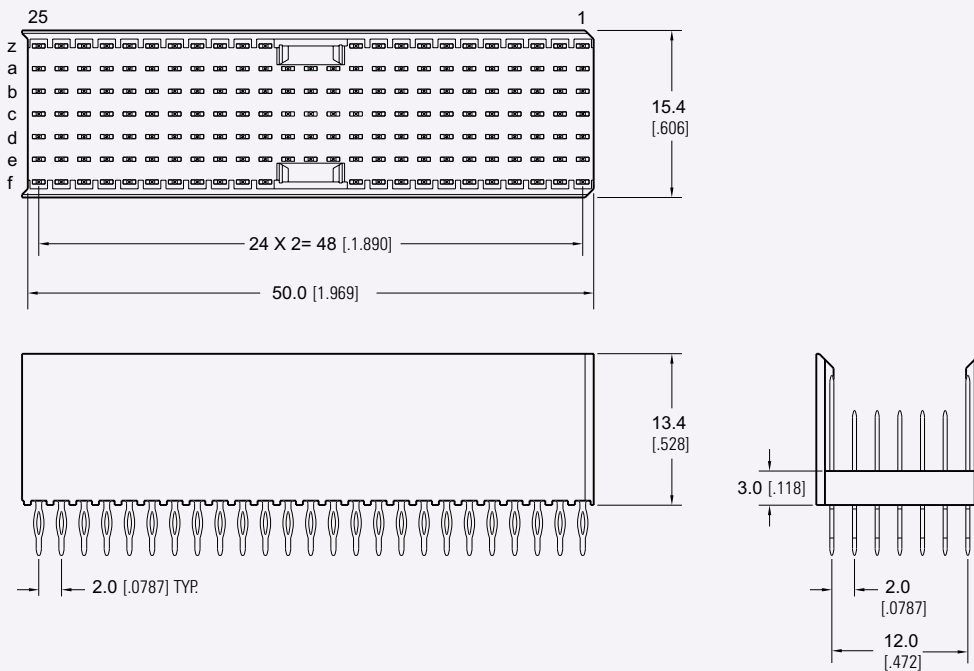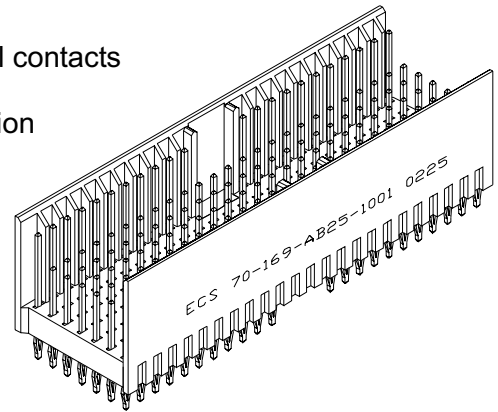


Dimensions are in mm [inch]

BOARD LAYOUT

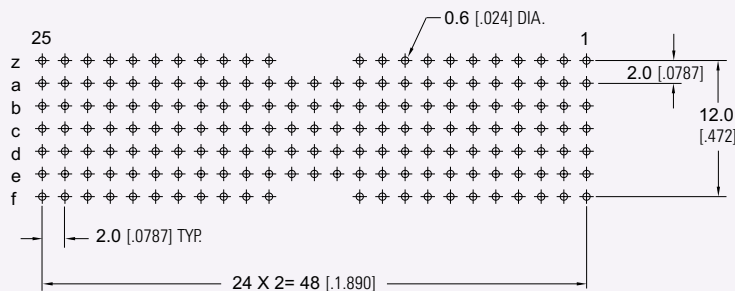

Identification	Number of Contacts	Contact Mating Side	Termination Side	Part Number	Contact Configuration
Type AB With Shield Without Peg	169	8.2 [.323]	13.0 [.512]	70-169-AB25-1001	
Type AB Without Shield Without Peg	125	9.7 [.382] 11.2 [.441]	14.5 [.571] 16.0 [.630]	70-125-AB25-1001	
Type AB With Shield Without Peg	169	8.2 [.323] 9.7 [.382] 11.2 [.441]	3.7 [.146]	70-169-AB25-1101	

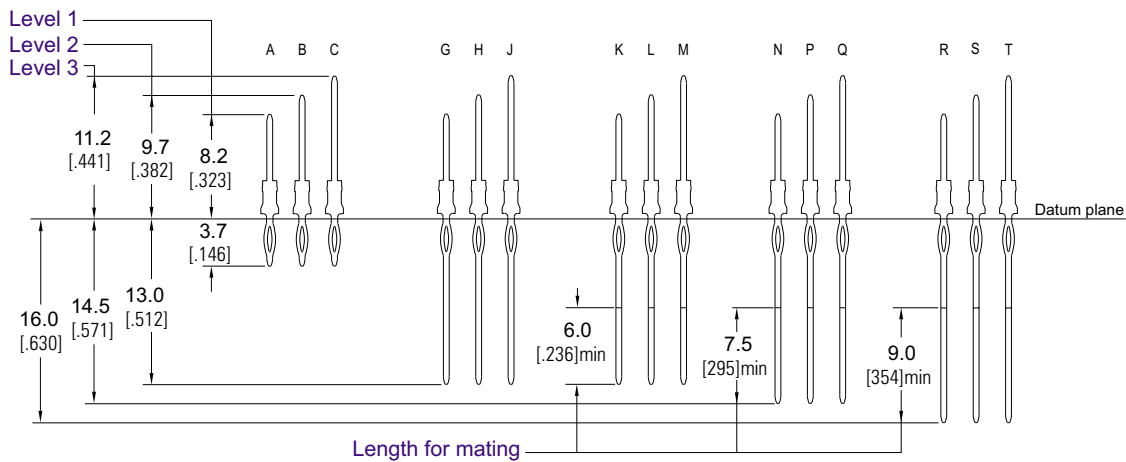

CONSULT FACTORY FOR CUSTOM CONNECTORS BUILT TO YOUR SPECIFICATION